
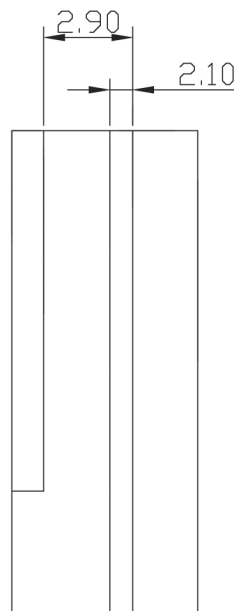



所有材料為
"環保材料"
2012.8.01
RoHS

SPECIFICATIONS

Current rating : 3.0A AC, DC
 Voltage rating : 250V AC, DC
 Temperature range : -25°C to +85°C
 Contact resistance : 20mΩ Max.
 Insulation resistance : 1000MΩ Min.
 Withstanding voltage : 800V AC/minute
 Material : Nylon 66, UL94V-0

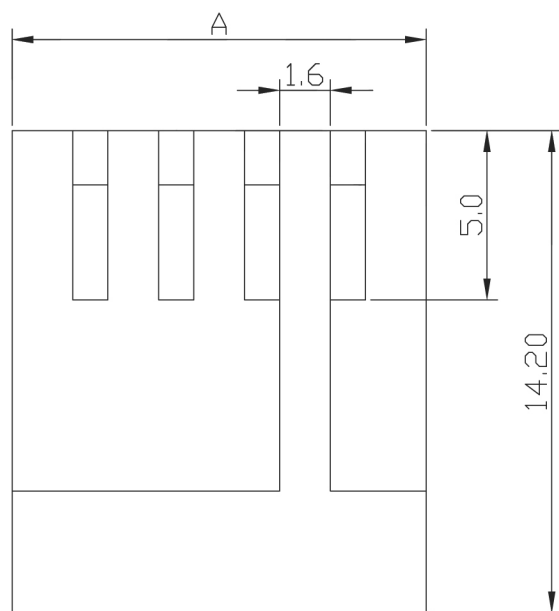

Part NO.	Dim(mm)
	A
CS4-H1114-02	7.30
CS4-H1114-03	9.90
CS4-H1114-04	12.50
CS4-H1114-05	14.80
CS4-H1114-06	17.40
CS4-H1114-07	20.10
CS4-H1114-08	22.20
CS4-H1114-09	25.00
CS4-H1114-10	27.60
CS4-H1114-11	29.80
CS4-H1114-12	32.70

DESCRIPTION(內容): 2.5mm Wire-to-Board Housing PART NO: (料號) CS4-H1114-XX DWG NO(圖號): 2442-H-XX	DRAWN(製圖): GONG	GENERAL TOLERANCE: (公差) .X ±0.5 .XX ±0.2	REV: R1	REV R0 R1 R2 R3	DESCRIPTION RELEASE 2014料號P數編碼統一兩碼	DATE 2012.08.01 2014.12.19
	CHECKED(確認): MANDY		UNIT: mm			
	APPROVAL(核准): JOHNNY	SCALE(比例): FREE		SIZE: A4		
				SHEET: 1/1		