
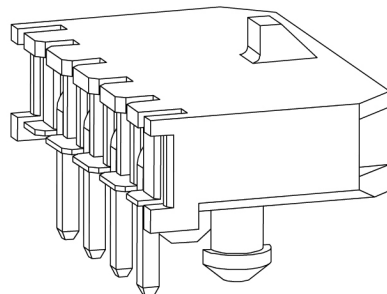


SPECIFICATIONS

Current rating : 5A AC, DC
 Voltage rating : 250V AC, DC
 Temperature range : -25°C ~ +85°C
 Contact resistance : 10mΩ Max
 Insulation resistance : 1000MΩ Min
 Withstanding voltage : 1500 V AC/minute
 Finished : Brass/Tin-plated
 Housing Material : PBT+30%GF/LCP/NL-6T/
 PA-46, UL94V-0
 Color : Black






PART NO. :

CW-W3001WR(X) - XX

Material NO. OF CONTACTS (01-12 P)
 P: PBT
 C: LCP
 N: Nylon-6T
 A: PA-46

Dimensions

circuit	A	B	C	circuit	A	B	C
01	--	6.65	--	07	18.00	24.65	13.70
02	3.00	9.65	--	08	21.00	27.65	16.70
03	6.00	12.65	--	09	24.00	30.65	19.70
04	9.00	15.65	4.70	10	27.00	33.65	22.70
05	12.00	18.65	7.70	11	30.00	36.65	25.70
06	15.00	21.65	10.70	12	33.00	39.65	28.70

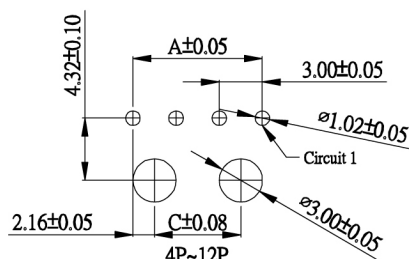

P.C.B. LAYOUT

DESCRIPTION(內容):
**MX3.00mm Micro-Fit S/R
 DIP W90¹ (環保材料)**

PART NO:
 (料 號) **CW-W3001WR(X)-XX**

DWG NO(圖號):

DRAWN(製圖):
 鄧文廣

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:
 (公差)

.X ±0.50 Angle
 .XX ±0.25 1/2°X
 .XXX ±0.10

SCALE(比例):
 1:XX



REV:
A/3

UNIT:
mm

SIZE:
A4

SHEET:
1/2

REV

1

2

3

4

DESCRIPTION

新增塑膠材質&料號選項

DATE

2013.07.24

2014.11.11

2015.01.21