
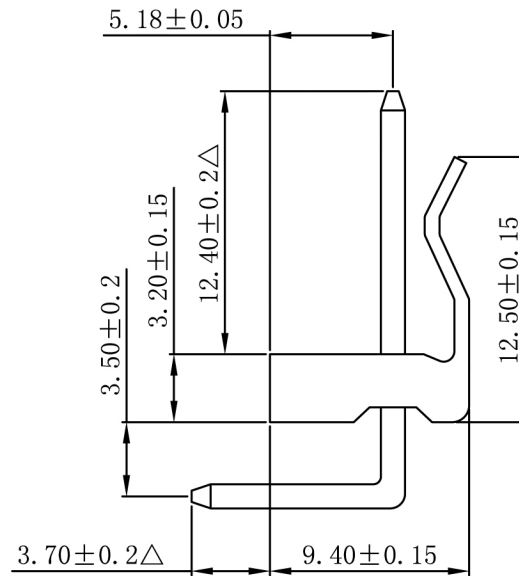


P. C. B Hole Layout

SPECIFICATIONS

Current rating : 7A AC, DC
 Voltage rating : 250V AC, DC
 Temperature range : -25° C ~ +85° C
 Contact resistance : 10mΩMax
 Insulation resistance : 1000MΩMin
 Withstanding voltage : 1500 VAC/minute
 Pin Material : Brass
 Finished : Tin-plated
 Housing Material : Nylon-66, UL94 V-2
 Color : Translucence

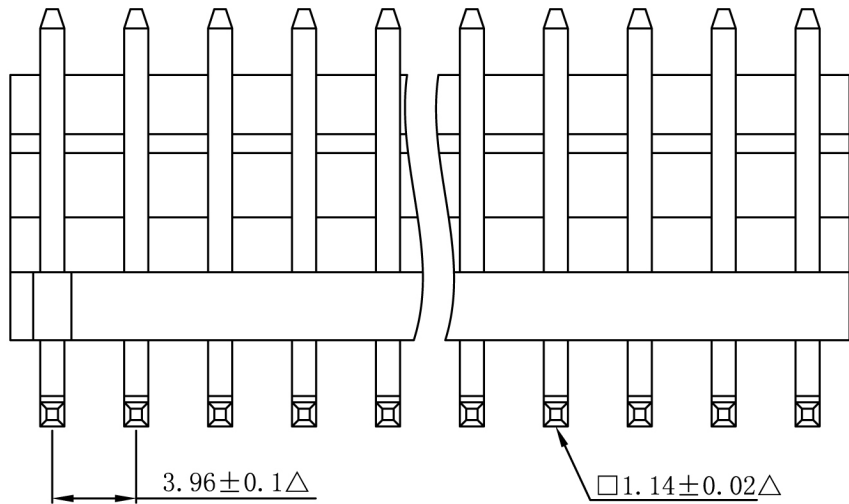

Circuits	Patr No.	Dimension mm	
		A	B
2	CW-W396R-02	3.96	7.92
3	CW-W396R-03	7.92	11.88
4	CW-W396R-04	11.88	15.84
5	CW-W396R-05	15.84	19.80
6	CW-W396R-06	19.80	23.76
7	CW-W396R-07	23.76	27.72
8	CW-W396R-08	27.72	31.68
9	CW-W396R-09	31.68	35.64
10	CW-W396R-10	35.64	39.60
11	CW-W396R-11	39.60	43.56
12	CW-W396R-12	43.56	47.52
13	CW-W396R-13	47.52	51.48
14	CW-W396R-14	51.48	55.44
15	CW-W396R-15	55.44	59.40
16	CW-W396R-16	59.40	63.36
17	CW-W396R-17	63.36	67.32
18	CW-W396R-18	67.32	71.28
19	CW-W396R-19	71.28	75.24
20	CW-W396R-20	75.24	79.20

DESCRIPTION(內容):
MX 3.96mm Wafer 90° □=1.14
 (環保材料)

PART NO:
 (料 號) **CW-W396R-XX**

DWG NO(圖號):

DRAWN(製圖):
 黃炳秋


CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:
 (公差)

.0 ±0.20
 .00 ±0.15
 .000 ±0.10

SCALE(比例):
 1:XX



REV:
 A/7

UNIT:
 mm

SIZE:
 A4

SHEET:
 1/1

REV

1

2

3

5

DESCRIPTION

更新電氣特性

增加產品顏色標注

更改特性

尺寸變更

DATE

2007.04.24

2007.06.16

2010.12.03

2013.03.22