

所有材料為
"環保材料"
2006.7.10
RoHS

SPECIFICATIONS

Current rating : 3A AC, DC

Voltage rating : 250V AC, DC



Temperature range : -25°C to +85°C

Contact resistance : 10mΩ Max.

Insulation resistance : 1000MΩ Min.

Withstanding voltage : 800V AC/minute

Material : Nylon 66, UL94V-0

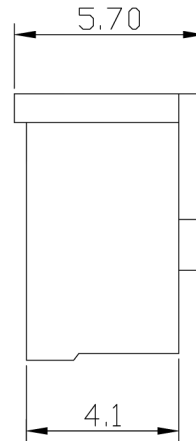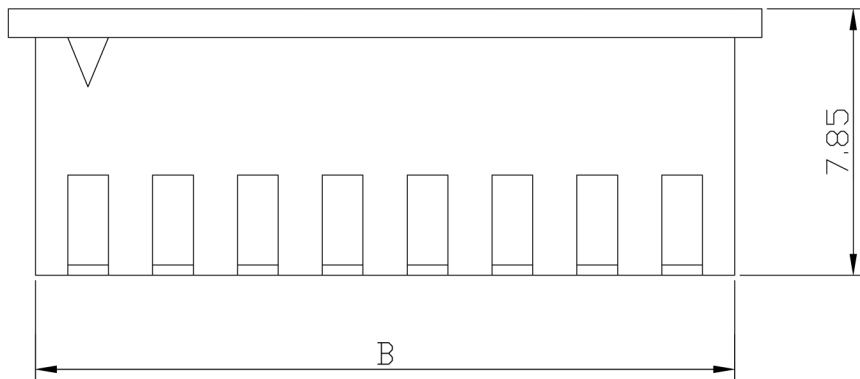

Poles	Dimension mm (in.)		Part No.
	A	B	
02	2.50 (0.098)	5.70(0.224)	CX-H250-02
03	5.00 (0.197)	8.20(0.323)	CX-H250-03
04	7.50 (0.295)	10.70(0.421)	CX-H250-04
05	10.00 (0.394)	13.20 (0.520)	CX-H250-05
06	12.50 (0.492)	15.70(0.618)	CX-H250-06
07	15.00 (0.591)	18.20(0.717)	CX-H250-07
08	17.50 (0.689)	20.70(0.815)	CX-H250-08
09	20.00 (0.787)	23.20(0.913)	CX-H250-09
10	22.50 (0.886)	25.70(1.012)	CX-H250-10
11	25.00 (0.984)	28.20(1.110)	CX-H250-11
12	27.50 (1.802)	30.70(1.209)	CX-H250-12
13	30.00 (1.181)	33.20(1.307)	CX-H250-13
14	32.50 (1.280)	35.70(1.406)	CX-H250-14
15	35.00 (1.378)	38.20(1.504)	CX-H250-15
16	37.50 (1.476)	40.70(1.602)	CX-H250-16
17	40.00 (1.578)	43.20(1.701)	CX-H250-17
18	42.50 (1.680)	45.70(1.799)	CX-H250-18
20	47.50 (1.870)	50.70(1.996)	CX-H250-20

PART NO: (料 號) CX-H250-XX DWG NO(圖號): 2500J-H	DESCRIPTION(內容): 2.5mm Wire-to-Board Housing	DRAWN(製圖): Gong	GENERAL TOLERANCE: (公差)	REV: R4	REV	DESCRIPTION	DATE
		CHECKED(確認): MANDY	.X ±0.3 .XX ±0.2	UNIT: mm	R0 R1	環保料	2006.01.12 2006.07.10
		APPROVAL(核准):	SCALE(比例): FREE	SIZE: A4	R2	變更環保章字樣	2006.08.15
		JOHNNY	⊕	SHEET: 1/1	R3 R4	新增17.18P, 變更額定電流(原:2.5A) 2014年料號編碼統一兩碼	2013.03.08 2014.11.11