
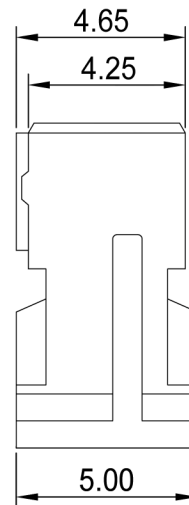
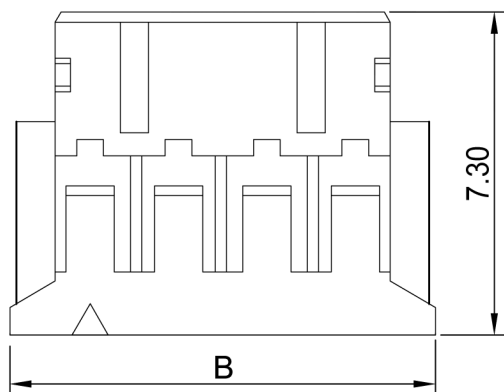


A**B****C****D****E**

所有材料為
"環保材料"
2006.6.29
RoHS

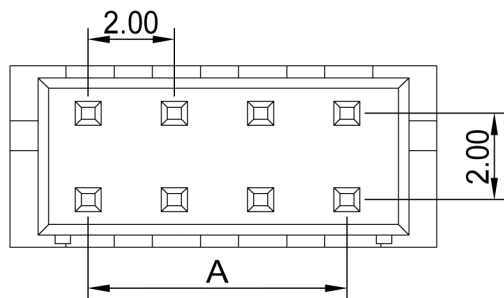

SPECIFICATIONS

Current rating : 2A AC, DC
 Voltage rating : 250V AC, DC
 Temperature range : -25° C to +85 ° C
 Contact resistance : 20mΩ Max.
 Insulation resistance : 1000MΩ Min.
 Withstanding voltage : 800V AC/minute
 Material : Nylon 66, UL94V-0

Ordering Information & Dimensions

Poles	Dimension (mm)		Part No.	Note.
	A	B		
2x2	2.00	5.90	PHD-H20-2x02	
2x3	4.00	7.90	PHD-H20-2x03	
2x4	6.00	9.90	PHD-H20-2x04	
2x5	8.00	11.90	PHD-H20-2x05	
2x6	10.00	13.90	PHD-H20-2x06	
2x7	12.00	15.90	PHD-H20-2x07	
2x8	14.00	17.90	PHD-H20-2x08	
2x9	16.00	19.90	PHD-H20-2x09	
2x10	18.00	21.90	PHD-H20-2x10	
2x11	20.00	23.90	PHD-H20-2x11	
2x12	22.00	25.90	PHD-H20-2x12	
2x13	24.00	27.90	PHD-H20-2x13	
2x14	26.00	29.90	PHD-H20-2x14	
2x15	28.00	31.90	PHD-H20-2x15	
2x16	30.00	33.90	PHD-H20-2x16	

1

2

3

1

2

3

	DESCRIPTION(內容): 2.0mm Wire-to-Board Housing	DRAWN(製圖): GONG	GENERAL TOLERANCE: (公差) X.XX ± 0.2 X.X ± 0.3	REV: R4	REV	DESCRIPTION	DATE
		CHECKED(確認): MANDY		UNIT: mm	R0	RELEASE	2006.03.20
	PART NO: (料號) PHD-H20-2×XX	APPROVAL(核准):	SCALE(比例): FREE	SIZE: A4	R1	導入RoHS	2006.06.29
	DWG NO(圖號): 2000D-2×XX	JOHNNY		SHEET: 1/1	R2	變更環保章字樣	2006.08.21
					R3	新增2×2PIN尺寸	2010.07.07
					R4	2014年料號修改/統一P數編碼	2014.09.11

A**B****C****D****E**