

TOT-5361AMG-B

Three Digit Display LED

Part Number	Chip			Face Color	Segment Color
	Material	Source Color			
TOT-5361AMG-B	AlGaInP	MG	Ultra-green	Black	White


Features

- Three Digit display
- Common cathode
- Low power requirement
- RoHS compliant

Applications

- Audio equipment
- Instrument panels
- Symbol display

Package Dimensions & Internal Circuit Diagram

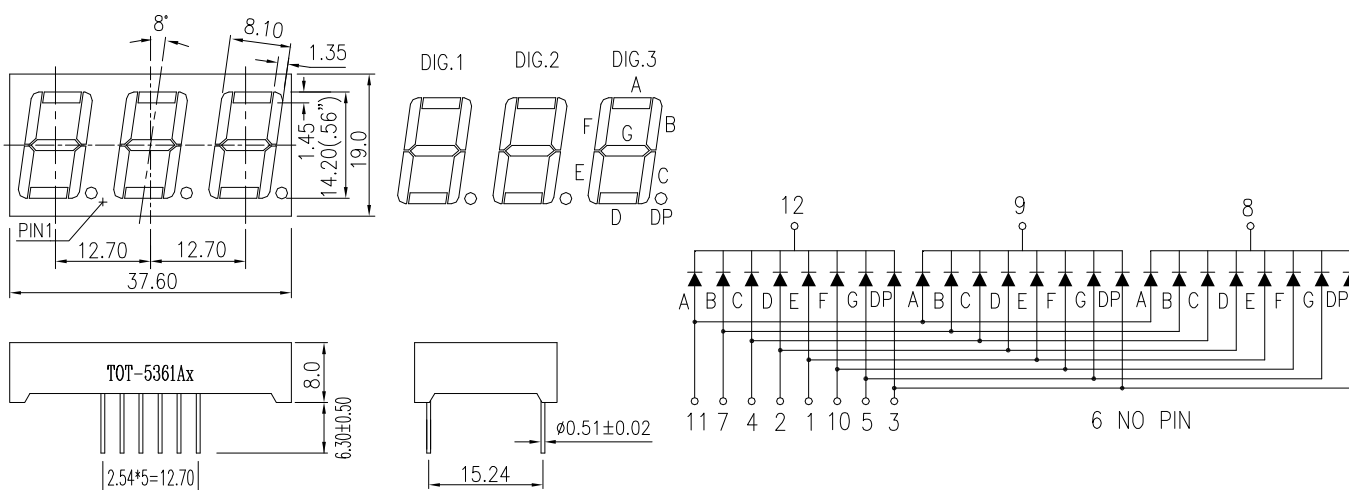

Notes:

1. All dimensions are in millimeters, tolerance: ± 0.25 ; Angle: $\pm 3^\circ$ unless otherwise noted.
2. Specifications are subject to change without notice.

Absolute Maximum Rating @ Ta=25°C

Parameter	Maximum Rating	Unit
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	80	mA
Power Dissipation	75	mW
Continuous Forward Current	20	mA
Recommend Operating Current	12	mA
Reverse Voltage	5	V
Operating Temperature Range	-25°C to +85°C	
Storage Temperature Range	-30°C to +85°C	
Lead-Free Solder Temperature (1/16 Inch Below Seating Plane)	260°C for 3 Sec	

Electrical / Optical Characteristic @ Ta=25°C

Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Luminous Intensity	I_V		11941		ucd	$I_F = 10\text{mA}$
Dominant Wavelength	λ_d		572		nm	$I_F = 20\text{mA}$
Spectral Line Half-Width	$\Delta\lambda$		15		nm	$I_F = 20\text{mA}$
Forward Voltage	V_F	1.80	2.00	2.30	V	$I_F = 20\text{mA}$
Reverse Current	I_R			100	μA	$V_R = 5\text{V}$
Luminous Intensity Matching Rate	I_{V-m}			2.0:1		$I_F = 20\text{mA}$